


The Aruba AP 80M

The Aruba 80M is the ideal wireless solution for harsh outdoor environments where conventional Wi-Fi access points cannot be deployed. The Aruba 80M is a dual-radio 802.11a/b/g access point that also supports wireless air monitoring capability. Designed for extreme, all-weather deployment (such as extreme heat, cold, rain), the Aruba 80M operates as a “thin” AP, fully controlled and managed an Aruba Mobility Controller. The Aruba 80M’s flexible design supports a variety of attachable antennas and supports an integrated PPP over Ethernet client for remote deployments over service provider networks.

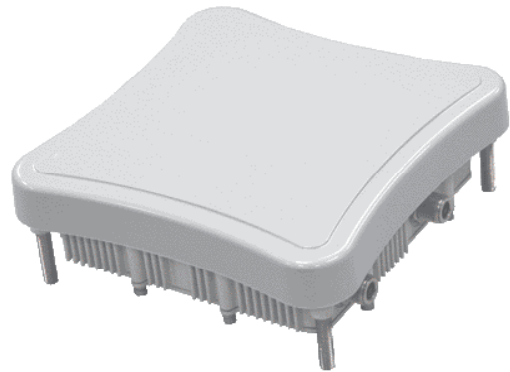

Network Configuration

- Wireless Access Point (802.11a/b/g)
- Air Monitor (802.11a/b/g)

Antennas

- None. External N-type antenna interfaces provided (see interfaces electrical)

Radio Specs - 5GHZ

IEEE 802.11a

- Frequency Bands Supported
 - 5.150 ~ 5.250GHz, country specific
 - 5.250 ~ 5.350GHz, country specific
 - 5.470 ~ 5.725GHz, country specific
 - 5.725 ~ 5.825/5.850GHz, country specific
- Radio technology: orthogonal frequency division multiplexing (OFDM)
- Modulation type – BPSK, QPSK, 16-QAM, 64-QAM
- Transmit power – configurable by system administrator/professional installer
- MAC – CSMA/CA with ACK
- Operating channels:
 - US, Canada - 8
 - ETSI - up to 19
 - Japan - 4
- Data rates: 6, 9, 12, 18, 24, 36, 48, 54 Mbps per channel
- Radio band selectable via software

Radio Specs - 2.4GHZ

IEEE 802.11b

- Frequency Bands Supported
 - 2.400 ~ 2.4835GHz, channels country specific
- Radio technology – direct sequence spread spectrum (DSSS)
- Modulation type – CCK, BPSK, QPSK
- Transmit power – configurable by system administrator
- MAC – CSMA/CA with ACK
- Operating channels:
 - US, Canada - 11
 - ETSI - 13
 - Japan 14
- Data rates: 1, 2, 5.5, 11 Mbps per channel
- Radio band selectable via software

IEEE 802.11g

- Frequency Bands Supported
 - 2.400 ~ 2.4835GHz, channels country specific
- Radio technology: orthogonal frequency division multiplexing (OFDM)

- Modulation type – BPSK, QPSK, 16-QAM, 64-QAM
- Transmit power – configurable by system administrator
- MAC – CSMA/CA with ACK
- Operating channels:
 - US, Canada - 11
 - ETSI - 13
 - Japan 13
- Data rates: 6, 9, 12, 18, 24, 36, 48, 54 Mbps per channel
- Radio band selectable via software

Complete country list available at:
<http://www.arubanetworks.com/products/aps/certification>

Manageability

- Management of all 802.11 parameters as AP
- Network-wide AP management via:
 - CLI
 - WEB GUI
 - SNMP
- Access point profiles
- Management by:
 - Geographical location
 - BSSID
 - Radio type
- Encryption support (AP and Mobility Controller)
 - 40-bit / 64-bit / 128-bit / 152-bit WEP, TKIP, AES, WPA, WPA2

Interfaces (Electrical)

AP-80M Interfaces

- 1 x 10/100 Base-TX auto-sensing Ethernet interface (IP67 8-pin male (pole) M12 circular DIN connector (Au) contacts):
 - Auto-sensing MDI/MDX
 - PoE 48V DC / 1.2A (30W) power over Ethernet (non-standard 802.3af)
 - Integral lightning arrester
- 1 x 2.4Ghz N-Type Female Antenna Interface
- 1 x 5Ghz N-Type Female Antenna Interface
- 1 x Electrical Ground / Safety Terminal
- 1 x Integral ENET lightening arrester

Power Adapter Interfaces

Access Point (AP) Port

- 1 x 10/100 Base-TX auto-sensing Ethernet (RJ-45) network (AP) interface:
 - Auto-sensing MDI/MDX
 - PoE 48V DC / 1.2A power over Ethernet (non-standard 802.3af)

Network (ENET) Port

- 1 x 10/100 Base-TX auto-sensing Ethernet (RJ-45) network (ENET), Auto-sensing MDI/MDX Ethernet Interface Supplied with 8-Pin DIN

to RJ-45 CAT-5 Shielded Ethernet Cable (50 m / 164 ft)

Interfaces (Mechanical)

- 4 x Mounting Bracket Points
- Ruggedized wall, pole or mast mount hardware provided (articulating in horizontal and vertical planes)

Visual Indicators (LEDS)

- (Ready) Power on/off (provided on Power Injector)

Power Requirements

- Access Point power draw - 48V DC / 1.2A (30W) Power-over-Ethernet (non-standard 802.3af)
- External Power Injector, auto-sensing 100-240V AC Input, 1.5A Output 48 VDC, 1.2A (30W) (provided)

Device Dimensions H/W/D

- 198 x 198 x 70mm (7.80 x 7.80 x 2.76in.)
- Weight - 1.6Kilo (3.53lbs)

Shipping Dimensions H/W/D

- 500 x 300 x 170mm (19.7 x 11.8 x 6.7in.)
- Gross Weight - 6Kilos (13.22lbs)

Environmental

AP-80 Access Point

- Temperature
 - Operating: -30 to 55 °C (-22 to 131 °F)
 - Storage: -40 to 80 °C (-40 to 176 °F)
- Humidity 0% - 95% (non-condensing)
- Survival Wind Speed: 201Km/hr / 125mph

External Power Adapter

- Temperature
 - Operating: 0 to 60 °C (32 to 140 °F)
 - Storage: -50 to 70 °C (-58 to 158 °F)
- Humidity 0% - 95% (non-condensing)

Mounting Options

- Wall, pole or mast mount (hardware included)

Standards

- Ethernet IEEE 802.3 / IEEE 802.3u
- Wireless IEEE 802.11a/b/g
- PPP over Ethernet RFC2516

Compliance

- cULus listed (only if AC Power Supplied)
- PSE Mark (only if AC Power Supplied)
- IEC 60950 CB certificate and report
- FCC DOC Part 15 Class B (digital portion)
- FCC Part 15 Subpart C 15.247
- FCC Part 15 Subpart E 15.407
- ICES-003 Class B
- RSS 210 (Canada)
- VCCI Class B (Japan)
- Telec 2.4GHz, Channel 14 and 5GHz approved (Japan)
- CE marked with NB letter of opinion for RTTE
 - ETS 300 328 2.4 GHz Band
 - ETS 301 893 5.4 GHz Band

– ETS 301 489 EMC

- MIC Korea
- SRRC (China)
- AS/NZS CISPR22 Class B
- AS/NZS4771 (C-tick)

Safety

- UL Listed (UL60950)
- UL Listed (Canadian Electrical Code/CSA 22.2 No. 60950)
- EN60950 / IEC60950

Warranty

- 90 days parts/labor*

Part Numbers

AP-80M

Aruba 80M Outdoor Wireless 802.11a/b/g Access Point / Air Monitor. Includes wall, pole, mast mounting hardware, 48V DC (30W) Power Adapter kit with Ethernet (RJ-45) interface and 50 Meter AP to Power Ethernet Adapter Cable.

AP-LAR-1

N-type antenna interface lightning arrester

Antenna

Aruba offers a wide variety of outdoor rated detachable antenna types certified for use with the Aruba 80. Please contact your local sales representative for details.



*Extended with support contract